




US 20020078893A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2002/0078893 A1**  
Os et al. (43) **Pub. Date: Jun. 27, 2002**(54) **PLASMA ENHANCED CHEMICAL  
PROCESSING REACTOR AND METHOD****Related U.S. Application Data**(63) Continuation of application No. 09/575,217, filed on  
May 18, 2000, now Pat. No. 6,375,750.(75) Inventors: **Ron van Os**, Sunnyvale, CA (US);  
**William J. Durbin**, Capitola, CA (US);  
**Richard H. Matthiesen**, Scotts Valley,  
CA (US); **Dennis C. Fenske**, Felton,  
CA (US); **Eric D. Ross**, Santa Cruz,  
CA (US)**Publication Classification**(51) **Int. Cl.<sup>7</sup>** ..... **C23C 16/00**; C23F 1/00  
(52) **U.S. Cl.** ..... **118/723 I**; 118/723 MW;  
156/345.41; 156/345.48

Correspondence Address:

**Patent Counsel**  
**APPLIED MATERIALS, INC.**  
**P.O. Box 450A**  
**Santa Clara, CA 95052 (US)**(73) Assignee: **Applied Materials, Inc.**(21) Appl. No.: **09/994,008**(22) Filed: **Nov. 16, 2001****ABSTRACT**

A plasma enhanced chemical processing reactor and method. The reactor includes a plasma chamber including a first gas injection manifold and a source of electromagnetic energy. The plasma chamber is in communication with a process chamber which includes a wafer support and a second gas manifold. The plasma generated in the plasma chamber extends into the process chamber and interacts with the reactive gases to deposit a layer of material on the wafer. The reactor also includes a vacuum system for exhausting the reactor. The method includes the steps of generating a plasma within the plasma chamber, introducing at least one gaseous chemical into the process chamber proximate to the wafer support and applying r.f. gradient to induce diffusion of the plasma to the area proximate the wafer support.

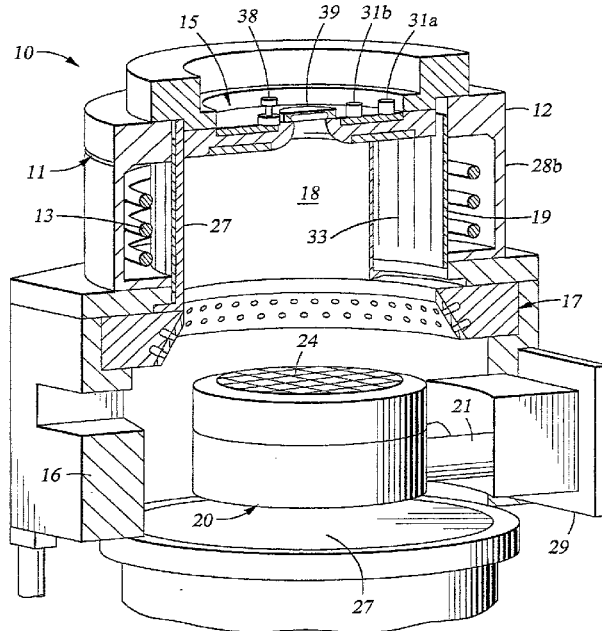

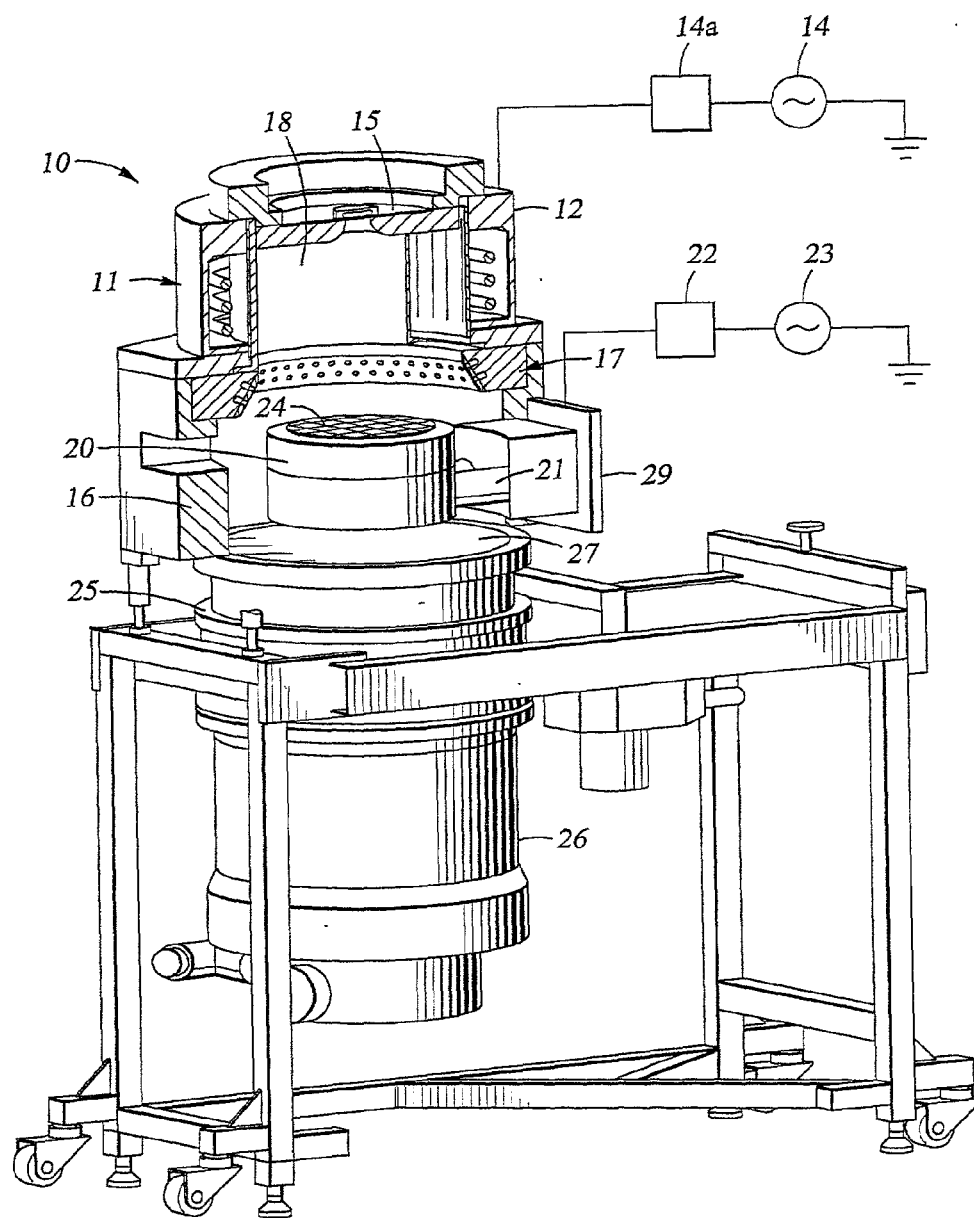


Fig. 1

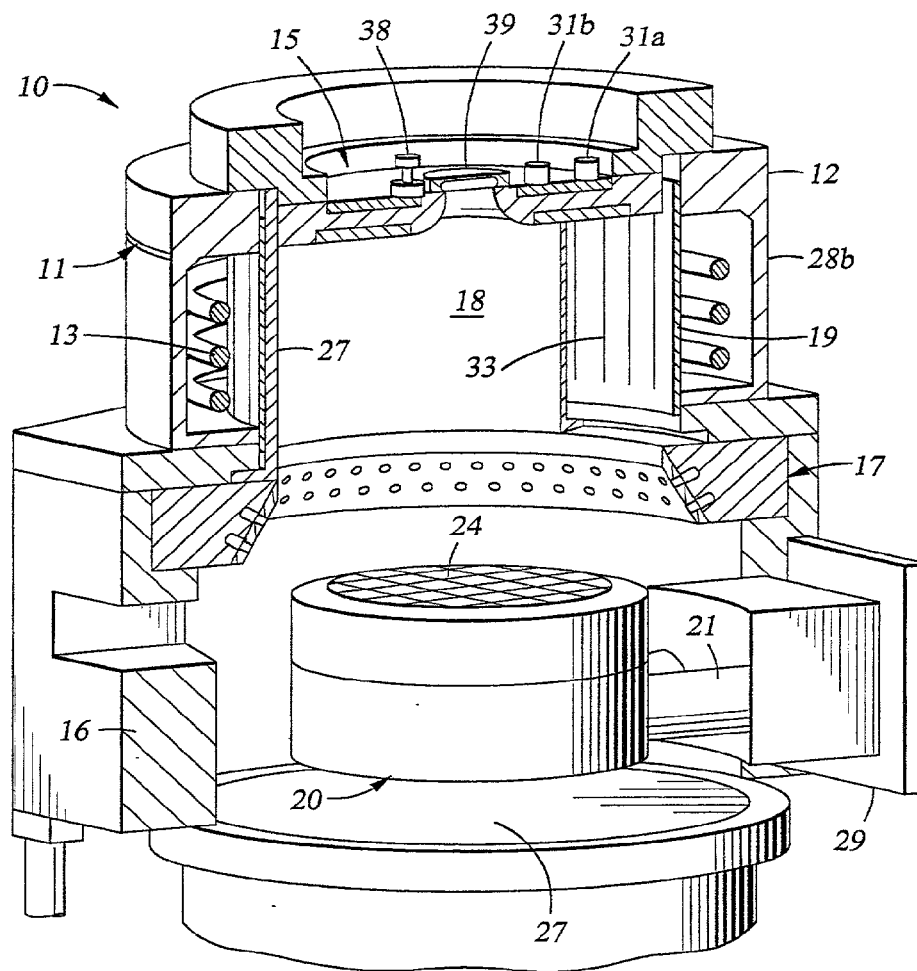


Fig. 2



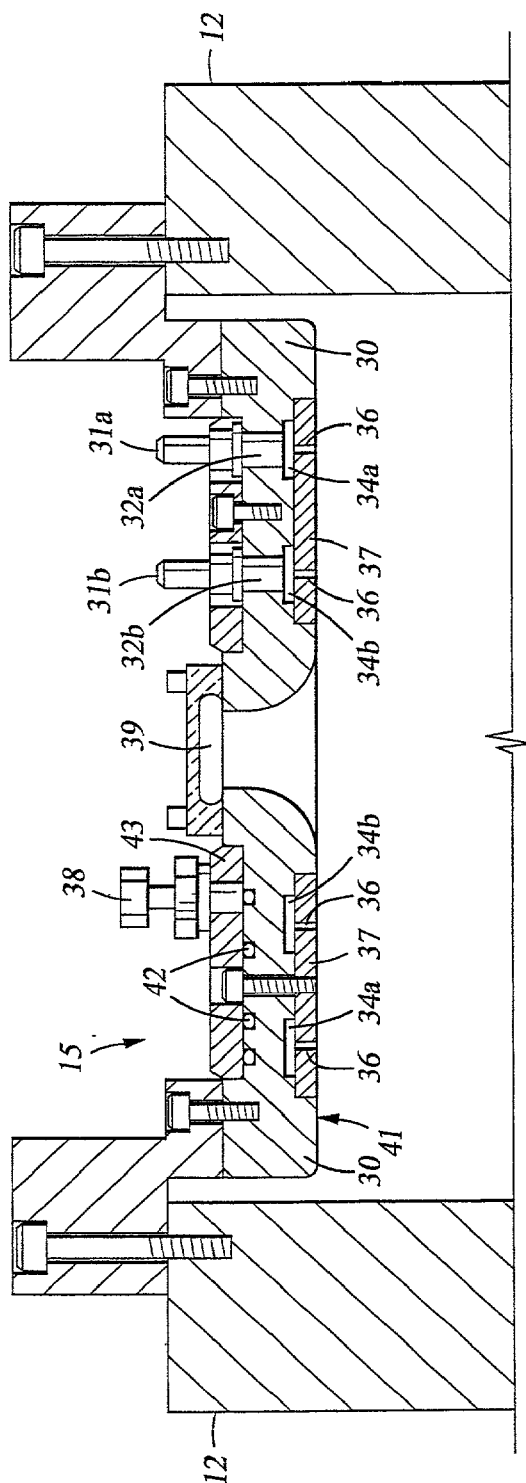



Fig. 3A

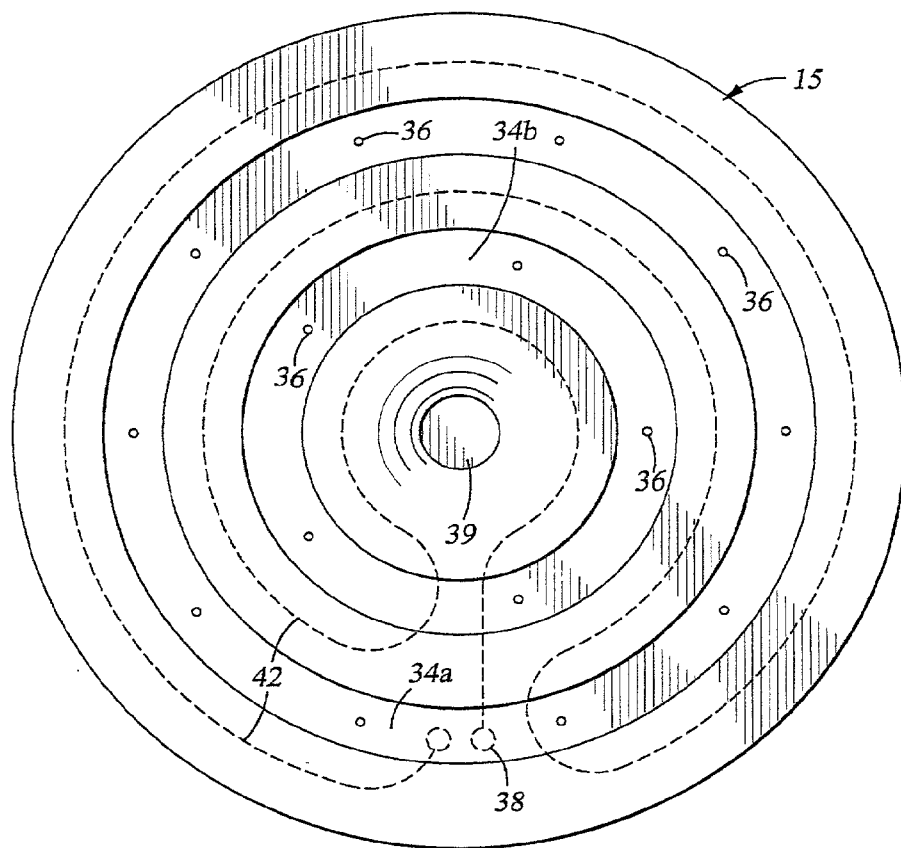

*Fig. 3b*

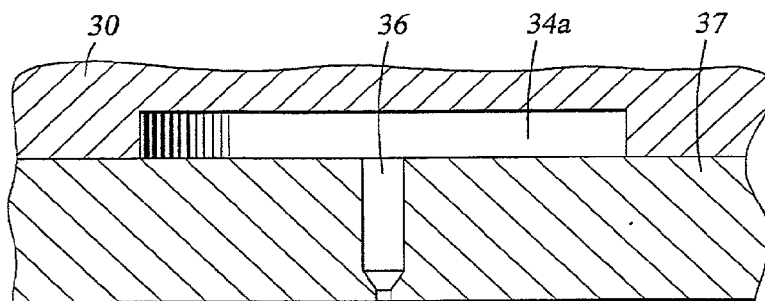

*Fig. 3c*

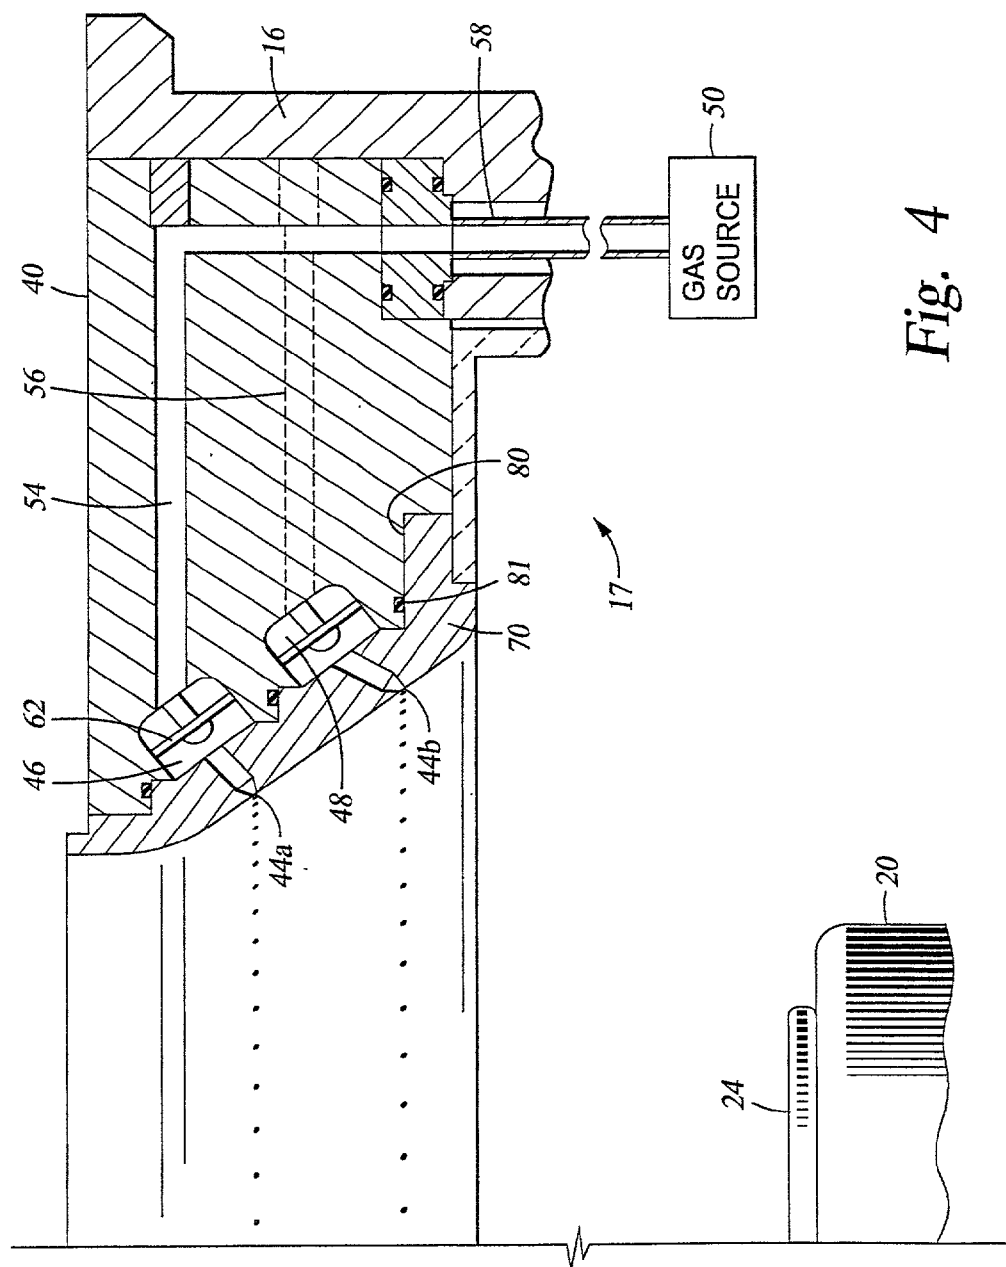

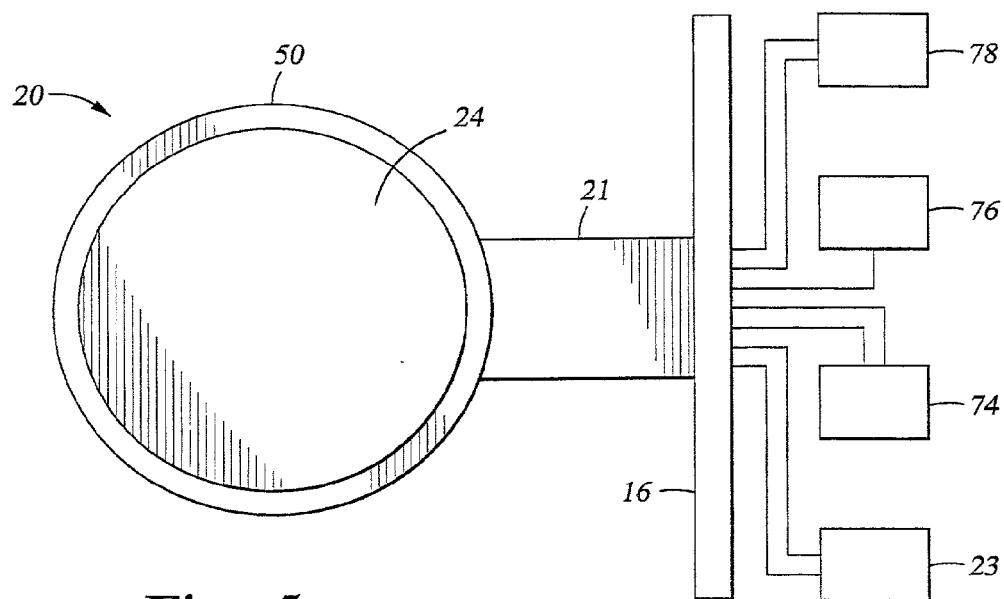


Fig. 5a

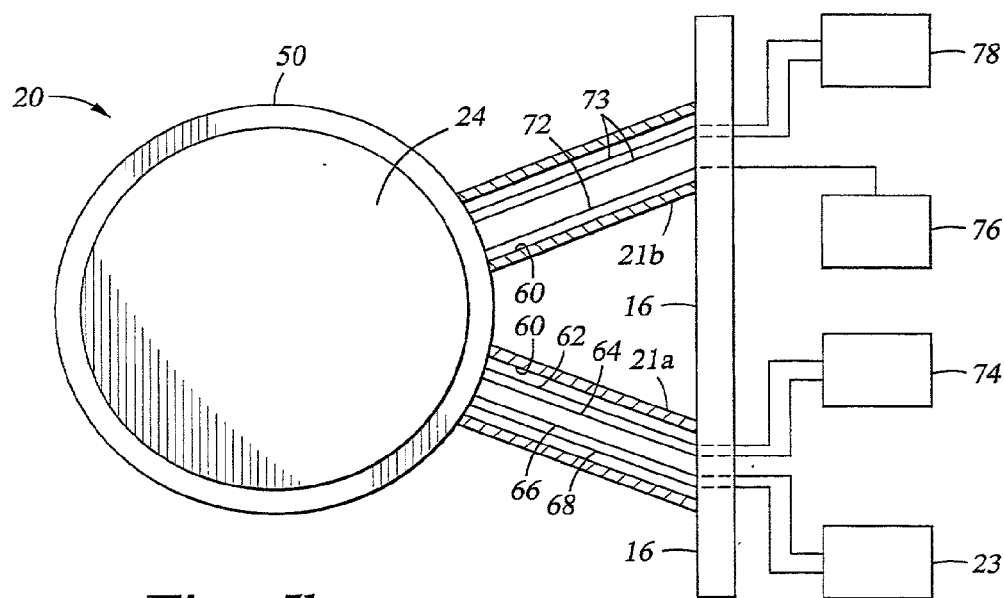


Fig. 5b

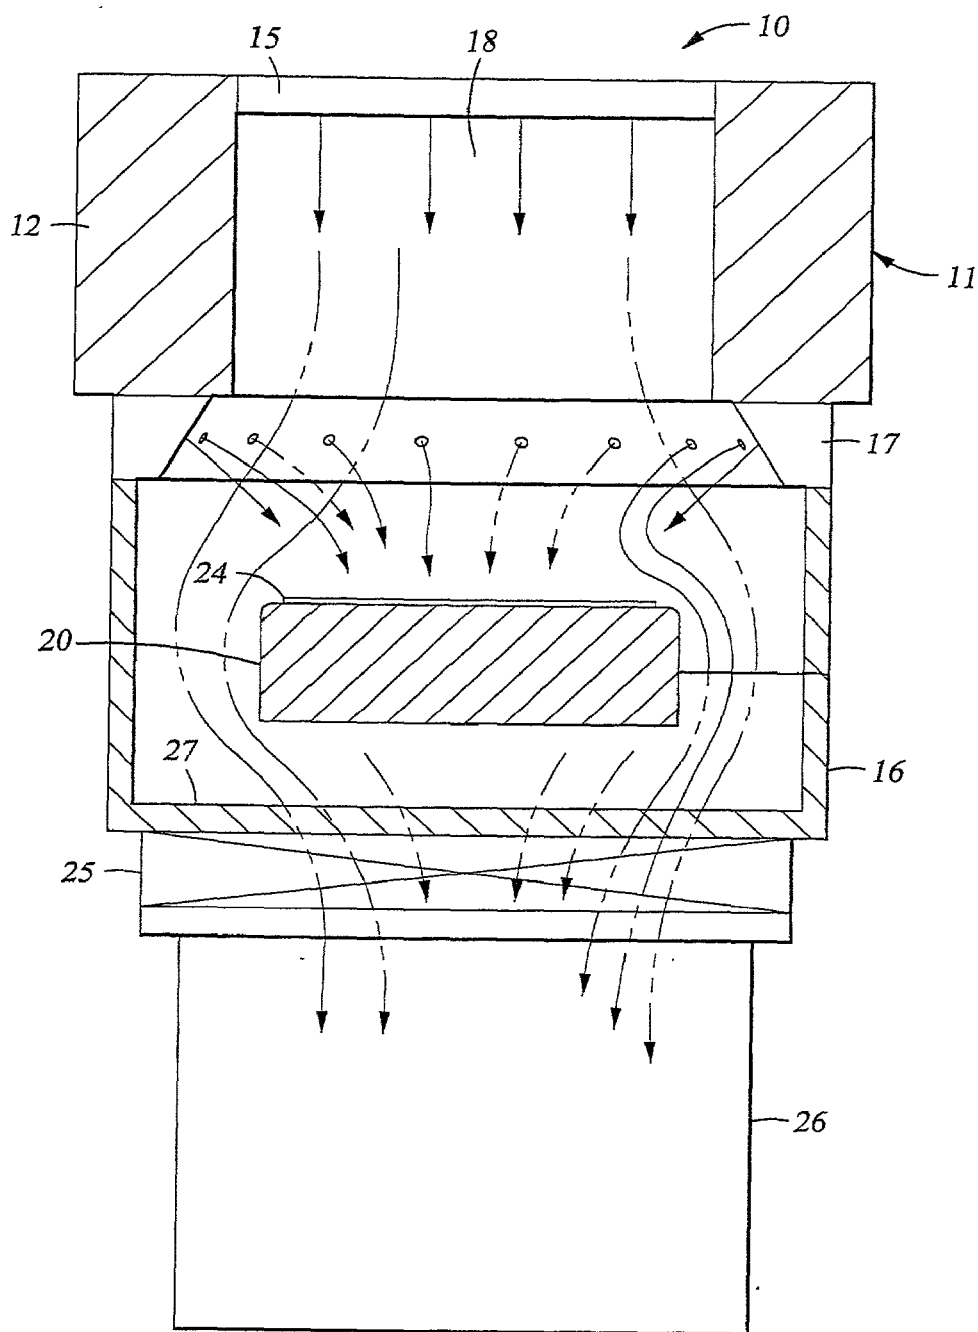


Fig. 6





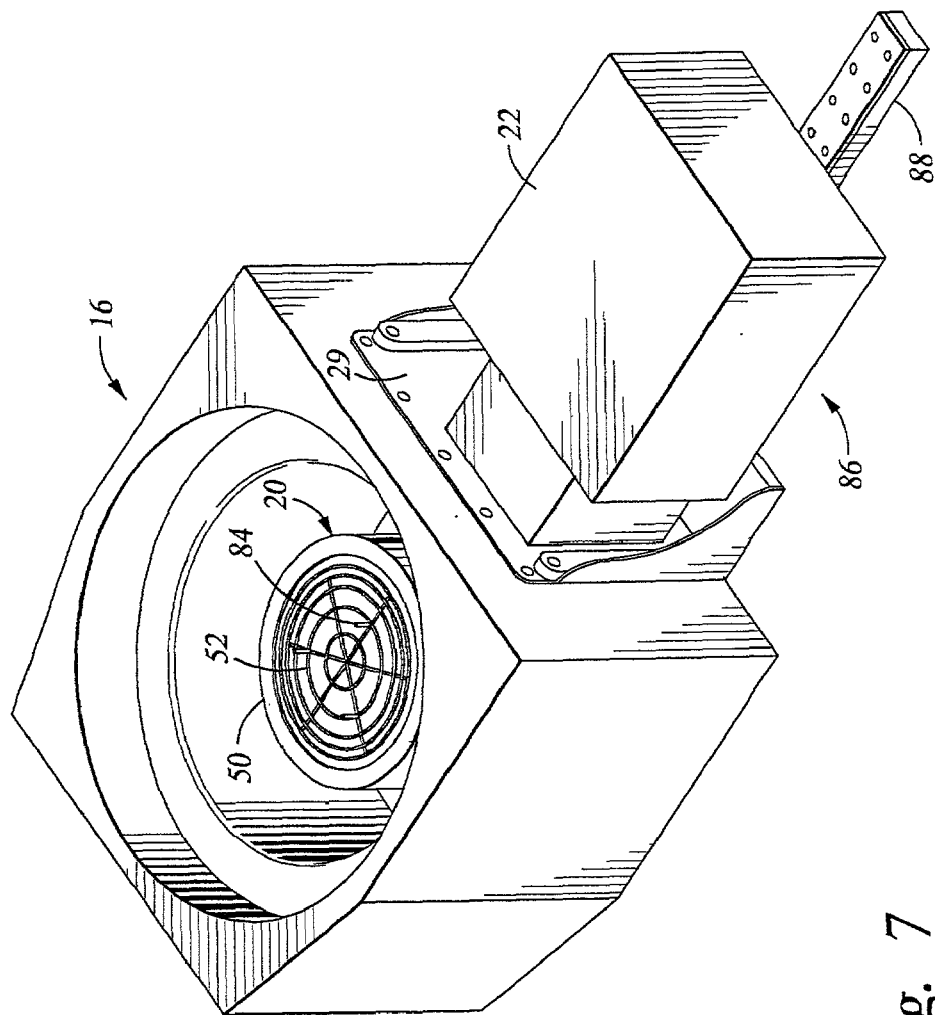



Fig. 7

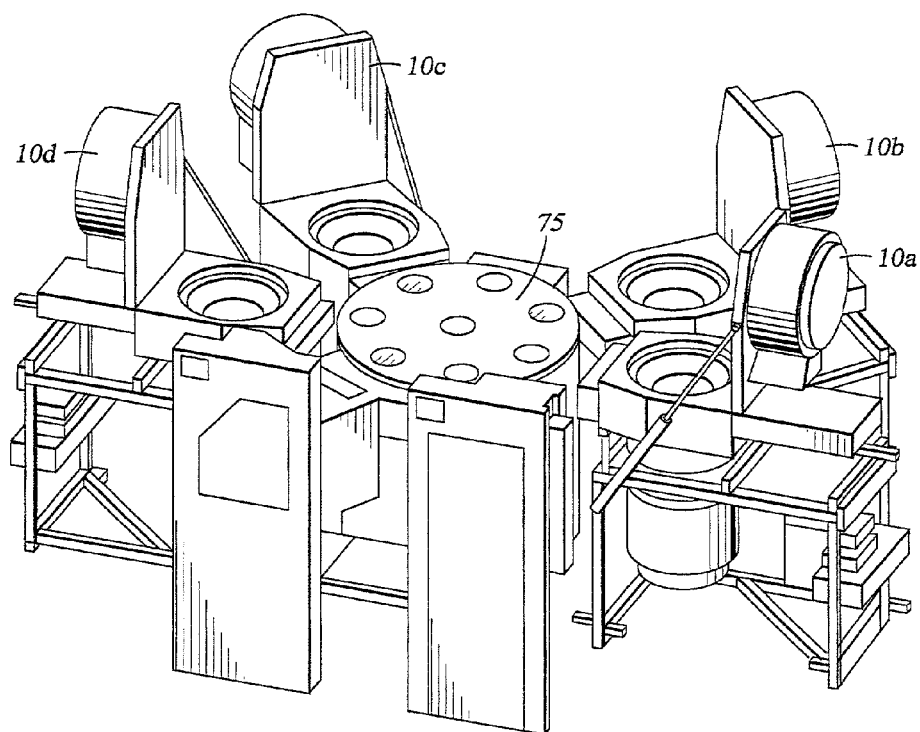

*Fig. 8*



*Fig. 10a*



*Fig. 10b*

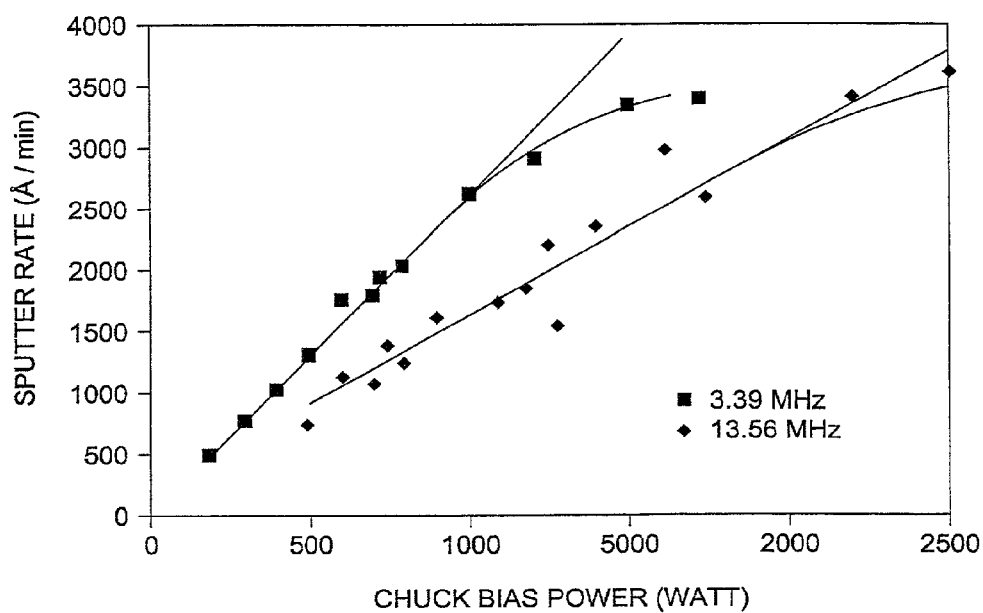


Fig. 9

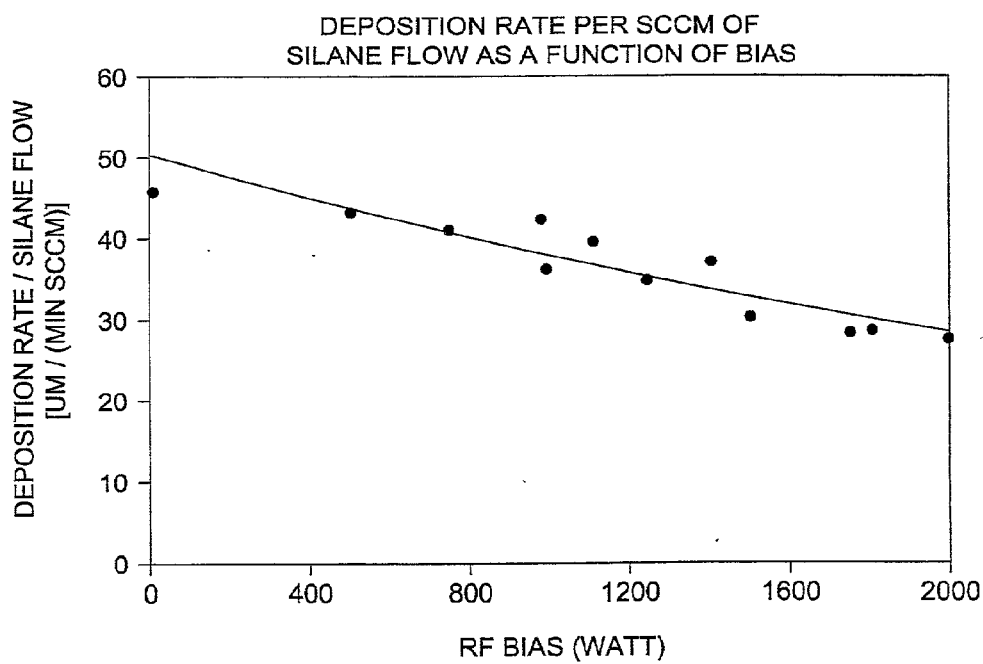


Fig. 11

## PLASMA ENHANCED CHEMICAL PROCESSING REACTOR AND METHOD

### BRIEF DESCRIPTION OF THE INVENTION

[0001] This invention relates to a reactor and method for processing semiconductor integrated circuits. More particularly, the invention relates to a plasma enhanced reactor and method capable of performing processing operations including depositing uniform films or layers on the surface of integrated circuits by plasma enhanced chemical vapor deposition (PECVD), film etchback, reactor self-clean, and simultaneous etch and deposit operations. A

### BACKGROUND OF THE INVENTION

[0002] The processing of semiconductor wafers and other integrated circuits (IC) includes critical manufacturing steps such as etching wafer surfaces and depositing layers of material on wafer surfaces to form device components, interconnecting lines, dielectrics, insulating barriers and the like. Various systems have been employed to deposit layers of material and the like on the surface of integrated circuits, and often such layers are formed by chemical vapor deposition (CVD). A conventional thermal CVD process deposits a stable chemical compound on the surface of a wafer by thermal reaction of certain gaseous chemicals. Various CVD reactors have been used in the art including low pressure CVD systems and atmospheric pressure CVD systems. More recently, plasma enhanced (sometimes called plasma assisted) CVD systems (PECVD) have been developed. PECVD systems generally operate by disassociation and ionization of gaseous chemicals. The high electron temperatures associated with the plasma increase the density of the disassociated species available for deposition on the wafer surface. Accordingly, such systems are able to operate at lower temperatures than conventional thermal CVD systems. Such lower temperature processes are desirable and minimize diffusion of shallow junctions and inter-diffusion of metals contained within the integrated circuits. Moreover, PECVD systems are suitable for forming multiple dielectric layers to be used to isolate stacked device features as device densities increase. When forming such multilayer dielectric layers it is desirable to provide a layer with good gap fill, isolation, stress and step coverage properties. These properties become more difficult to attain as device dimensions shrink.

[0003] In PECVD systems, the reactor is typically operated at low pressures during processing of the semiconductors. Such low pressures present particular gas flow dynamics considerations that must be addressed. With low pressures, the collision rate of the active species is relatively low and the mean-free path of the species is relatively long. Accordingly, it is desirable to provide a reactor capable of uniform, controlled gas flow within the process chamber, across the wafer, and to the exhaust, thus providing uniform processing of the wafer. Moreover, other operating pressures may be used for various processes, and thus it is desirable for the reactor to be capable of operating over a large pressure range.

[0004] Cleaning of the reactor plays an important role in the effective operation of a system. The highly reactive species deposit on the walls of the chamber, and the operating components, as well as on the surface of the substrate.

Such deposits affect the operation of the system, may affect the plasma potentials within the system, and are a serious source of particulates which may end up contaminating the deposited film. Accordingly it is advantageous to provide a reactor design capable of self cleaning.

### OBJECTS AND SUMMARY OF THE INVENTION

[0005] It is an object of this invention to provide a reactor for processing semiconductor wafers and integrated circuits.

[0006] More particularly, it is an object of this invention to provide an improved reactor for processing wafers by depositing films or layers on the surface of such wafers by plasma enhanced chemical vapor deposition (PECVD).

[0007] Another object of this invention is to provide a reactor which is capable of operating over a wide pressure range.

[0008] Another object of this invention is to provide a reactor capable of depositing desired films and simultaneously etching such films.

[0009] Yet another object of the invention is to provide a reactor capable of self-cleaning.

[0010] A related object of this invention is to provide a reactor which improves the quality of films deposited on wafers.

[0011] These and other objects are achieved by the reactor herein disclosed generally comprising a plasma chamber communicating with a process chamber. The plasma chamber includes a first gas injection manifold for receiving at least a first gas; and a source of electromagnetic energy which excites the gas to form a plasma. The process chamber includes a wafer support for supporting a wafer to be processed, and a second gas manifold which encircles the wafer support and directs reactive gases toward the wafer support. The plasma generated in the plasma chamber extends into the process chamber and interacts with the reactive gases to deposit a layer of material on the wafer. A vacuum system communicates with the process chamber for exhausting the reactor.

[0012] The invention also includes a method of operating a reactor having a plasma chamber and a process chamber with a wafer support disposed within the process chamber, which includes the steps of: generating a plasma within the plasma chamber, introducing at least one gaseous chemical into the process chamber proximate to the wafer support and applying r.f. gradient to induce diffusion of the plasma to the area proximate the wafer support, whereby the plasma and the gaseous chemical interact proximate the wafer support to form a layer of material on the surface of the wafer.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Other objects and advantages of the invention become apparent upon reading of the detailed description of the invention and the appended claims provided below, and upon reference to the drawings in which:

[0014] **FIG. 1** is a partially broken away assembly view of the reactor according to one embodiment of the invention.

[0015] **FIG. 2** is an enlarged partially broken away cross-sectional view of the plasma chamber and process chamber of the reactor as shown in **FIG. 1**.

[0016] FIG. 3a illustrates a cross-sectional view of a first gas injection manifold according to one embodiment of the invention.

[0017] FIG. 3b is bottom plan view of the first gas injection manifold.

[0018] FIG. 3c is an enlarged cross-sectional view of the holes in the manifold of FIG. 3a.

[0019] FIG. 4 represents a front plan view, partially broken away, of one embodiment of a second gas injection manifold in accordance with the invention. FIG. 5a is a top plan view showing the substrate support mounted in the reactor.

[0020] FIG. 5b depicts an alternate embodiment of the substrate support, partially broken away, mounted in the reactor in accordance with the invention.

[0021] FIG. 6 is an enlarged side elevated view showing the substrate support and carriage assembly in accordance with the invention.

[0022] FIG. 7 is a cross-sectional view of the reactor of the invention and illustrates the flow of gases within the system in response to the on-axis placement of the pump.

[0023] FIG. 8 is a simplified block diagram illustrating a PECVD system with a plurality of reactors in accordance with an alternative embodiment of the invention.

[0024] FIG. 9 illustrates sputter rate as a function of substrate support bias power.

[0025] FIG. 10a and 10b are cross-sectional views of surface topography of semiconductor wafers processed in the reactor of the invention.

[0026] FIG. 11 illustrates the deposition rate per silane flow as a function of the applied r.f. bias.

#### DETAILED DESCRIPTION OF THE INVENTION

##### [0027] A. Overview

[0028] Turning to the drawings, wherein like components are designated by like reference numbers in the figures, FIGS. 1 and 2 represent one embodiment of the reactor in accordance with this invention. FIG. 1 illustrates an assembly view of the invention wherein reactor 10 generally comprises a plasma assembly 11 and a process chamber 16. The plasma assembly 11 which includes a plasma generating source 12, the interior of such source 12 forms a plasma chamber 18, and a first gas injection manifold 15 forms the top of the chamber. The first manifold 15 conveys at least one gaseous chemical to plasma chamber 18. The plasma assembly 11 is operatively attached to process chamber 16. Process chamber 16 generally includes a second gas injection manifold 17, which is mounted to process chamber 16, for receiving at least a second gaseous chemical via gas delivery lines (not shown). Preferably, the gas injection manifold 17 is mounted near the top of chamber 16 with an outer peripheral surface being mounted along the wall of process chamber 16, thus forming a continuous ring. Further, positioned within chamber 16 is a horizontal wafer support 20 (often referred to as a "chuck") for supporting a wafer 24. Preferably, wafer support 20 is attached to chamber 16 by arm member 21 such that the wafer support 20 is suspended within the process chamber 16. A wafer 24 is

placed on the wafer support 20 whereby the surface of the wafer 24 is facing upwards. The wafer support 20 may be biased by applying r.f. energy from generator 23 via matching network 22.

[0029] A vacuum system is provided for exhausting the reactor 10. A vacuum pump 26 is operatively coupled to the process chamber 16, by port 25. Preferably, vacuum pump 26 is substantially axially aligned with the process chamber 16 (referred to as an "on-axis pump") which provides improved flow control of the gases and plasma within the reactor 10. As discussed in detail below, the suspended wafer support 20 and the on-axis pumping form a unique gas distribution system which is designed to provide symmetrical flow of gases within the reactor 10, and particularly to promote uniform deposition and/or etching across the wafer 24.

[0030] The inventive reactor is adapted for performing various processing operations including deposition, film etchback, reactor self clean and simultaneous etch and deposition steps. In an exemplary embodiment of the deposition operation, silane and a mixture of oxygen and argon are conveyed into the process chamber 16 via second gas injection manifold 17. During the deposition operation, the first gas injection manifold may be inoperative, and in this configuration, oxygen and argon molecules migrate into the plasma chamber 18 from the process chamber 16 where they are originally injected, and are ionized in plasma chamber 18. Alternatively, the first gas injection manifold 15 may be operative whereby argon and oxygen are conveyed into the plasma chamber via first gas manifold 15. Furthermore in yet another embodiment, oxygen and argon are conveyed through both the first gas injection manifold 15 and the second gas injection manifold 17.

[0031] During a reactor self-clean operation, a chemical such as  $\text{CF}_4$ ,  $\text{C}_2\text{F}_4$  or  $\text{NH}_3$  is injected into the plasma chamber via first gas injection manifold 15, whereby the gases are ionized and then flow through the reactor 10 to remove unwanted deposits on the surfaces of the chambers 16 and 18 and associated components. Alternatively, the cleaning chemicals may be injected into the reactor via second gas injection manifold 17, or conveyed by both the first gas injection manifold 15 and the second gas injection manifold 17. Moreover, the reactor is adapted for application of an r.f. and dc bias induced at the wafer support for inducing a film etch-back operation and for simultaneous etch/deposit operation. The reactor and methods are described in further detail below.

##### [0032] B. Plasma Chamber

[0033] The plasma assembly 11 can be appreciated in further detail with reference to FIG. 2. Plasma assembly 11 includes a source of electromagnetic energy 12, commonly referred to as a "plasma source" for generating a plasma within the plasma chamber 18. Preferably the plasma source 12 is of the type classified in the art as inductively coupled plasma (ICP). In the preferred embodiment as shown in FIG. 2, the plasma source 12 is cylindrical and includes a helical coil 13 made of metal and a slotted electrostatic shield 19 made of a nonmagnetic material, said shield 19 being generally disposed within the coil 13. The coil 13 and shield 19 are housed within an enclosure having an inner 27 and outer 28 wall. Preferably, the inner wall 27 is made of a low loss insulating material, such as quartz or ceramic, and

the outer wall may be comprised of a metal. Plasma is generated in the plasma chamber 18 formed within the plasma source 12. This preferred embodiment of plasma source 12 is more fully described in U.S. Pat. No. 5,234,529 which is incorporated herein by reference.

[0034] A plurality of longitudinally extending and circumferentially spaced slits 33 are formed in the shield 19. The shield 19 is used to decouple capacitive electric fields. The shield 19 reduces the capacitive coupling between the coil 13 and the plasma chamber 18 where the plasma is generated. In one embodiment, the plasma source 12 and shield 19 attempts to fully shield all capacitive components. Preferably, the shield is grounded. Capacitively coupled fields couple very efficiently with the plasma, and produce large and generally uncontrollable r.f. plasma potentials. Such a plasma is referred to as a "hot plasma". The hot plasma comprises very high plasma particulate energies, particularly high electron temperatures ( $T_e$ ). The resulting high plasma potential damages the reactor by the attack of high energy particles at the chamber walls and other components of the reactor. This reduces the life of the reactor and creates metal particulate contamination which often ends up in the deposited film, thereby destroying the wafer. Moreover, the high plasma potential may adversely affect the wafer being processed. By employing the shield 19, the capacitive coupling is reduced to a desired amount, and by varying the slot openings 33 in the shield 19, the amount of capacitive coupling can be varied depending upon the application. For example, during a clean operation where the reactor 10 is cleaned to remove unwanted deposition of material on the surfaces of the reactor 10, greater capacitive coupling may be employed thereby creating a higher energy plasma to promote rapid cleaning.

[0035] To generate the plasma, according to one embodiment of the invention, at least one gas is delivered to the plasma chamber 18 by first gas injection manifold 15. The r.f. energy 14 is directed into plasma source 12 through coils 13 arranged around plasma chamber 18 which excites the gases in the plasma chamber 18 into a plasma state. In a plasma state a large percentage of the gaseous molecules introduced are dissociated to form reactive species, including ionized atoms. Preferably, an ion density of greater than  $10^{11}$  ions/cm<sup>3</sup> is achieved, and is referred to as a high density plasma (HDP). It is preferred that the frequency of the r.f. energy be 13.56 MHz, a commercial standard frequency. Generator 14 typically operates at a standard 50 ohm impedance, and matching network 14a, well known in the art, allows efficient coupling of the r.f. energy into the plasma source 12. Alternatively, gas is conveyed into the process chamber 16 via second gas injection manifold 17, whereby the gas migrated into the plasma chamber 18 and is excited into a plasma state as described directly above.

[0036] Referring again to FIG. 2, the first gas manifold 15 is illustrated as assembled on the plasma assembly. Further detail is appreciated with reference to FIG. 3a, which depicts a cross-sectional view of said manifold 15. In this embodiment, first gas manifold 15 is substantially circular and is attached to the inner periphery surface of the plasma source assembly 12. The manifold 15 includes a plurality of gas inlet passages 32a and 32b formed in the twofold base 30. For delivery of gaseous chemicals to the manifold 15, gas delivery lines (not shown) are connected to each of the gas inlet passages via gas feed connectors 31a and 31b. In

this embodiment two gas inlet passages are shown, however additional gas inlet passages, or only one gas inlet passage may be used.

[0037] The gas inlet passages 32a and 32b individually lead to concentric circumferentially extending plenums 34a and 34b. The plenums extend through the manifold base 30 and are enclosed by plate 37 mounted to manifold base 30. Disposed within each plenum 34a and 34b is a plurality of holes 36, drilled in the cover plate 37 and extending the circumference of each plenum. In one embodiment, the plurality of holes 36 are generally disposed at the bottom of each plenum 34a and 34b and extend vertically through the cover plate 37. Alternatively, the holes 36 may be drilled at an angle through said cover plate 37. The configuration of the holes 36 are selected to provide optimum gas injection to plasma chamber 18 and the number, size, shape and spacing of the holes may vary. Moreover, concentric hole arrays may be drilled in cover plate 37 and extending the circumference of each plenum.

[0038] FIG. 3b illustrates a bottom plan view of first gas injection manifold 15. As shown in the present embodiment, the holes 36 generally form concentric circles in the bottom of first gas injection twofold 15. Preferably, the plurality of holes associated with the inner plenum 34b comprises five, and the plurality of holes associated with the outer plenum 34a comprises ten. FIG. 3c is an enlarged view showing the preferred shape of hole 36.

[0039] Thus, in the present embodiment, gas delivery lines convey gaseous chemicals to the manifold 15 via two gas feed connectors 31a and 31b. Each gas is discretely conveyed through the manifold 15 by passages 32a and 32b, to circular plenums 34a and 34b, whereby the gases exit the manifold 15 through a plurality of holes 36 associated with each plenum, into the plasma chamber 18.

[0040] The first gas manifold 15 employs a cooling system for cooling the manifold 15 during operation of the reactor 10. A cooling medium such as water is circulated through the manifold 15 to provide substantially uniform cooling. Maintaining uniform temperature during operation is important, as the reaction taking place at the surface of the wafer 24 is temperature dependent. Moreover, failure to maintain constant temperature may lead to flaking of deposits on the chamber walls and associated components, thereby creating particulates in the system.

[0041] In the present embodiment, the cooling medium is delivered through cooling feed connector 38 to a plurality of channels 42. The channels 42 extend through the manifold and are enclosed by a cover plate 43 mounted to the manifold base 30. The channels 42 extend across the manifold base 30 as shown in FIG. 3b. In modifications to the invention, the cooling system may be configured differently.

[0042] A sight glass 39 is suitably disposed in the center of the gas injection manifold 15 for providing an optical interface to view the plasma discharge. Preferably, the sight glass is circular and is made of sapphire, which resists attack from the plasma and chemicals. Furthermore, sight glass 39 allows line-of-sight access to the wafer plane to allow remote diagnostics to be employed such as a laser interferometer (visible) to observe film growth, and a laser interferometer (R) to observe wafer temperature.

[0043] Preferably, the manifold 15 has a substantially smooth, planar surface for minimizing the depositing of

particulate thereon. In this embodiment the manifold **15** is made from aluminum and has a near polished surface finish.

[0044] C. Process Chamber

[0045] In order to process semiconductor wafers and other ICs, the reactor **10** includes a process chamber **16** which is attached to and communicates with plasma assembly **11**. Referring again to **FIGS. 1 and 2**, the internal structure of the process chamber **16** is illustrated in further detail. Preferably, the process chamber **16** is cylindrical and is made of a material such as alumina. The process chamber **16** preferably includes means for circulating a cooling medium, such as water, such means formed within the process chamber **16** walls, or alternatively disposed on the outside of process chamber **16**, in order to maintain the process chamber **16** at a constant temperature. A second gas injection manifold **17** is disposed within the process chamber **16** and generally extends along the surface of the chamber, forming a ring. Also positioned within the process chamber **16** is wafer support **20** which supports a wafer **24** to be processed. Preferably the wafer support **20** is, substantially aligned with the axis of the process chamber **16**, and thus, second manifold **17** encircles the wafer support **20**. A valve (not shown), such as a gate valve, is disposed in a side wall of the process chamber **16** to allow access to the interior of the chamber **16** for transporting the wafer **24** to and from the wafer support **20**. Positioned beneath the wafer support **20** and substantially axially aligned with the axis of the process chamber **16** is a pump **26** and isolation valve **25**.

[0046] The second gas injection manifold **17** is shown more particularly in **FIG. 4**. Second gas injection manifold **17** is described in further detail in co-pending application, Ser. No. \_\_\_\_\_, Flehr, Hohbach, Test et al., Docket No. A-62196, which is incorporated by reference herein. Generally, the manifold **17** includes a plenum body **40** mountable to the process chamber **16**, a replaceable nozzle structure **70** removably mounted to the plenum body **40** and at least one plenum formed for receiving a gaseous chemical. The plenum body is formed with at least one conduit which is coupled to the plenum for conveying the gaseous chemical to the plenum. The nozzle structure **70** has a plurality of nozzles **44a** and **44b** coupled to the plenum and configured for injecting the gaseous substance from the plenum to the chamber. In the present embodiment, the first gas manifold **17** has an annular configuration with an outer peripheral surface being mounted to the process chamber **16** wall; however, other configurations are within the scope of the invention.

[0047] As shown in **FIG. 4**, the preferred embodiment of the manifold **17**, the plenum body **40** has two parallel, circumferentially extending channels **46** and **48** formed in the plenum body **40**. The channels **46** and **48** partially define a pair of plenums for discretely receiving the gaseous chemicals employed in the processing of the wafer. Channels **46** and **48** are each connected to a gas source **50** and **52** (not shown) through conduits **54** and **56** via supply lines **58** and **60** (not shown). Supply lines **58** and **60** extend vertically to intersect the conduits **54** and **56**, and is referred to as "bottom feed" of the gases. In an alternative embodiment, the supply lines **58** and **60** may be configured to extend horizontally through the process chamber **16** wall, as a "side feed."

[0048] Preferably, a baffle **62** formed with a plurality of openings (not shown) is mounted in each channel **46** and **48**

as is known in the art. Baffles **62** interrupt the flow of gas from the conduits **54** and **56** to the nozzles **44a** and **44b** adjacent the nozzles to diffuse the gas and more uniformly distribute the flow of the gas around the circumference of the plenum body **40**. The configuration of the baffles **62** is selected to provide optimum distribution of the gases and is subject to considerable variation. Moreover, the baffles **62** may be omitted if desired.

[0049] The nozzle structure **70** is removably mounted to the plenum body **40**, covering the channels **46** and **48** enclosing the plenums. The nozzle structure **70** includes a plurality of first nozzles **44a** substantially aligned with the channel **46** and a plurality of second nozzles **44b** aligned with the channel **48** for injecting the gaseous substances retained in the plenums into the process chamber **16**. The size, shape, spacing, angle and orientation of the nozzles may vary considerably. The nozzles **44a** and **44b** are preferably configured to provide the layers formed on the surface of wafer **24** with a substantially flat profile.

[0050] During operation of the reactor **10**, and particularly during PECVD processing of the wafer **24**, the nozzle structure **70** is exposed to the plasma. The gas injection manifold **17** is preferably grounded unless the nozzle structure **70** is formed of a dielectric material.

[0051] Manifold **17** is of particular advantage in high density plasma enhanced CVD processing because of the effects on the gas flow of factors such as the high density of the plasma, the low pressure of the reactor **10** of less than 3-4 mTorr, as compared to more than 100 mTorr for conventional plasma enhanced systems, and the relatively high electron temperature  $T_e$ . Because of the lower chamber pressure, the mean free path is large and causes quick dispersion of the gaseous chemical away from the injection point (i.e. the outlet of second gas injection manifold **17**), thus the close proximity of the manifold **17** to the surface of the wafer **24** allows the efficient use of chemicals and promotes a uniform gas distribution across the wafer plane.

[0052] As mentioned above, for securing the wafer **24** during processing, a wafer support **20** is provided in process chamber **16**. The wafer support **20** is generally described below; however, further detail is provided in co-pending applications Ser. No. \_\_\_\_\_, Flehr, Hohbach, Test et al., Docket No. A-62195 which is incorporated by reference herein. Referring to **FIGS. 2, 5b** and **7**, the wafer support **20** generally includes a support body **50** having a support surface **52** for retaining a wafer **24**, a voltage source **74** coupled to the support body for electrostatically coupling the wafer to the support surface, and a cooling system **78** for cooling the wafer. The cooling system includes a plurality of gas distribution grooves (not shown) formed in the support surface **52** for uniformly distributing a gaseous substance between the wafer **24** and the support surface **52**. The cooling system includes a restriction mechanism (not shown) in the conduit between the gas source and the gas distribution grooves to substantially prevent catastrophic separations of the wafer **24** from the support surface **52** in the event a portion of the wafer becomes separated from the support surface **52**. At least one arm member **21** extending from the support body **50** is mountable to the process chamber **16** with the support body **50** and the arm member **21** being separated from the bottom of the process chamber **16**. Referring to **FIG. 7**, in the present embodiment the arm

member **21** is mounted to a carriage assembly **86**, which in turn is releasably secured by plate **29** to the process chamber **16**.

[0053] The wafer **24** is lowered onto and raised from the support surface **52** by a lifting assembly (not shown). The lifting assembly includes a plurality of lifting pins **84** which extend through apertures formed in the support surface **52** and an electrode assembly (not shown). The lifting pins **84** are movably between an extended position whereby the pins retain the wafer **24** above the support surface **52**, and a retracted position.

[0054] The wafer support **20** employs inductance cooling the wafer during processing. A gaseous substance such as helium, argon, oxygen, hydrogen and the like, is distributed between the support surface **52** and the wafer **24** to provide substantially uniform cooling across the entire wafer **24**. Maintaining the entire wafer at a uniform temperature during processing significantly improves the uniformity of the layers formed on the wafer surface.

[0055] In the present embodiment, the wafer support **20** is particularly adapted for use with PECVD processing. The electrode assembly (not shown) includes means for applying an r.f. bias to the support body **50**. Electrode assembly includes a pair of electrical connectors (not shown) which couple inner and outer electrodes and, respectively, to an r.f. source **23** and a matching network **22**. Applying an r.f. bias to the support surface **52** increases the floating potential of the plasma in the localized area of the support surface **52**. The self-bias induced by applying the r.f. bias to the support surface **52** accelerates ions diffusing into the plasma sheath in the region of the wafer support **20** and towards the wafer **24**. This enhances sputter etching which is desirable in the formation of void-free layers of material on the surface of the wafer **24**.

[0056] The frequency of the r.f. bias applied to the wafer support **20** is within the range of 1-60 MHz. Preferably, the r.f. frequency of the plasma source **12** is different from that of the wafer support **20** to minimize frequency beating. Preferably, the frequency of r.f. applied to the wafer support **20** is approximately 3.39 MHz, and the plasma source **12** operates at approximately 13.56 MHz.

[0057] During processing, the wafer **24** is positioned on the support surface **52**, and particularly placed on lifter pins **54**, by a transport device known in the art (not shown). DC voltage is applied to the at least one electrode of the wafer support **20**, to electrostatically attract and securely retain the wafer to the support surface **52**. After processing the wafer **24**, the electrode is substantially grounded in order to sufficiently deactivate the electrostatic charge for release of the wafer **24** from the support surface **52**. Preferably, the support body **50** includes two electrodes whereby positive voltage is applied to one electrode, and negative voltage is applied to the other electrode. After the wafer **24** is removed from the process chamber **16**, preferably the polarity of the electrodes is reversed for the next wafer.

[0058] The unique mounting of the wafer support **20** in the process chamber **16** is of particular advantage in processing the wafer **24** substantially due to the promotion of symmetrical gas flow. Referring again to FIG. 2, at least one arm member **21** mounts the wafer support **20** to the process chamber **16** such that the wafer support **20** is suspended with

the process chamber **16**. Suspending the wafer support **20** such that it is removed from the bottom of the process chamber **16**, unlike prior art systems, offers improved flow control during processing and increased flexibility in the design of the overall reactor **10**. In the preferred embodiment, the vacuum system pump **26** is substantially axially aligned with the process chamber **16**, minimizing the footprint of the reactor **10** and improving the effectiveness of the pump during operation.

[0059] Turning to FIGS. 5a and 5b, two embodiments of the wafer support **20** mounted in the process chamber **16** are shown. Preferably, two arm members **21a** and **21b** extending toward one wall of the process chamber **16** are employed as depicted in FIG. 5b; however, it is to be understood that the number of arm members **21**, and their position where attached to the process chamber **16**, may vary.

[0060] Arm members **21a** and **21b** are each formed with a longitudinally extending bore **60** as illustrated in FIG. 5b. The bore of one arm member **21a** provides a conduit from the support body **50** for the electrical connectors **62** and **64** which couple the electrodes of the wafer support **20** to the voltage source **74**. Further, electrical connectors **66** and **68** couple the r.f. source **23** to the electrodes. The gas source **76** and the fluid source **78** for the electrodes assembly are connected to the support body **50** through conduits **72** and **74**, respectively, which extend through the bore **60** of arm member **21b**. Alternatively, FIG. 5a illustrates the use of one arm member **21** mounted to process chamber wall **16** whereby the fluid source **78**, gas source **76**, dc and r.f. sources **74** and **23** and their respective connections extend through the bore of arm member **21** to the wafer support **20**.

[0061] Operatively attached to the process chamber **16** is a vacuum system for exhausting the reactor **10**. Referring again to FIG. 1, the vacuum system includes a pump **26** and preferably a vacuum isolation valve **25** positioned beneath wafer support **20** and the bottom of the process chamber **16**. Preferably, the pump **26** and valve **25** are mounted substantially axially aligned with the process chamber **16**. Such inventive "on-axis" pumping is of particular advantage, and promotes symmetrical flow of gases within the reactor **10**. Pump **26** and valve **25** preferably are a turbo pump and a gate valve, respectively, as known in the art. A particular advantage of the invention is the symmetrical flow of the gases within the reactor provided by the inventive design, and the corresponding reduction of interference with the symmetry of the pump flow in the region proximate the wafer **24**. Referring to FIG. 6, the symmetrical flow within the reactor **10** is represented by flow lines.

[0062] According to the inventive reactor described herein, the placement of the side mounted substrate support **20** and the on-axis pumping form a unique gas distribution system that is designed to provide symmetrical flow of gases within the reactor **10**, and particularly to promote uniform deposition and/or etching across the wafer **24**.

[0063] FIG. 8 depicts an alternative embodiment of the invention, wherein a plurality of reactors **10a-d** are connected by a common transport module **75** known in the art, for processing a plurality of wafers. Each reactor **10a**, **10b**, **10c** and **10d** may perform a separate processing step, or the same processing step may be performed in each reactor.



**[0064]** D. Operation of the Reactor

**[0065]** To promote extension of the plasma into the process chamber **16**, the inventive reactor induces a potential gradient causing diffusion of the plasma. Plasma is generated close to coil **13** and will diffuse out in any direction. Referring again to **FIG. 3a**, first gas injection manifold has a surface **41** which acts to reference the plasma to a voltage potential. To direct the plasma, first gas injection manifold **15** preferably is grounded which induces the plasma to generate a slight positive charge at the surface **41** of the manifold **15** (i.e. the plasma potential). Alternatively, first gas injection manifold **15** may be held at some potential, instead of ground. Thus, the plasma is referenced to a particular potential in the localized area of the surface **41**. The plasma extends into the plasma chamber **16**, and ambipolar diffusion of the plasma will replenish any loss of charged particles in the process chamber **16**, providing for a steady supply of charged particles in the region where chemistry is taking place, i.e. at the wafer support **20**. Moreover, the plasma generated is a "cold plasma," i.e. the plasma potential is low. Thus the potential at the walls is very low, so the plasma is less likely to erode the walls of the chamber which minimizes metal contamination. Plasma is cold substantially due to the electrostatic shield **19** which forces the primary ionization mechanism to be inductive.

**[0066]** Upon application of r.f. bias, a self bias is induced at the wafer support **20** and wafer **24**. Control of the self bias may be effected by considering the ratio of the area of the bias r.f. current return path and the area of the wafer. In one embodiment during the deposition operation, the self bias accelerates ions from the plasma sheath in the reactor to the surface of the wafer **24**. The ions sputter etch the layer of material as it is deposited thereby enhancing deposition of a void-free, dense good quality film. The r.f. bias applied to the wafer support may range from 75 to 400 volts, and preferably is approximately 300 volts for an r.f. bias power of 1700 Watts.

**[0067]** It is desirable to choose the bias frequency such that it minimizes interference with the frequency of the plasma source **12** (i.e. intermodulation), and yet is sufficiently high in frequency as to allow for the induction of the dc self bias at the wafer. and to achieve such bias without excessive power requirements. Generally, lower frequencies generate larger induced voltages at the cost of ripple on top of the induced voltage. The sputter etch rate at the wafer **24** surface is proportional to the induced bias. An acceptable compromise is found at frequencies greater than 2 MHz and less than or equal to 13.56 MHz. The preferred embodiment employs a r.f. bias frequency applied to the wafer support **20** of 3.39 MHz; whose first harmonic coincides with a Federal Communications Commission (FCC) 6.78 ISM frequency (which stands for the Instruments, Scientific and Medical frequency band), and is sufficiently different from the r.f. plasma source **12** frequency to prevent intermodulation thereby minimizing control system instabilities.

**[0068]** The dependency of the sputter etch rate on the bias frequency is illustrated in **FIG. 9**. A wafer **24** with a layer of oxide is placed on the wafer support **20**. The reactor **10** pressure is approximately 1.8 mTorr, and argon gas at approximately 100 sccm is injected into the process chamber **16**. Two different bias frequencies, 3.39 MHz and 13.56

MHz, are applied, and the sputter etch rate is plotted as a function of bias power applied to the wafer support **20** for the two frequencies.

**[0069]** Circulating r.f. energy fields are present in the reactor **10**, and are of a particular concern when proximate to the wafer **24** in the process chamber **16**. One particular advantage of the invention is the function of the second gas injection manifold **17** as a r.f. current return path for the r.f. currents generated by biasing the wafer support with r.f. energy. A substantial amount of the circulating r.f. currents find a return path through the manifold **17**. Referring again to **FIG. 4**, the second gas injection manifold **17** is well grounded through mating surfaces **80** and **81** which are preferably plated with a suitable material such as nickel to enhance the metal surface-to-surface contact between the plenum body **40** and the nozzle section **70**. The interfacing surfaces of the metal are designed to promote low impedance contact and employs a special gasket material such as a spiral shield known in the art. The manifold **17** is coupled to ground and the mating surfaces **80** and **81** provide the return path for the r.f. energy generated when an r.f. bias is applied to the wafer support **20**. The r.f. currents travel along surfaces, not through the bulk of the metal; accordingly, the gasket material is placed close to the metal interfaces. Moreover, the placement of manifold **17** within the process chamber **16** is important; the manifold **17** is placed in close proximity to the wafer support **20** as compared to the proximity of the plasma source **12** and first gas injection manifold **15** to the wafer support **20**. The circulating r.f. currents generally encounter the second gas injection manifold **17** and are removed before encountering the other components. In the event the r.f. currents were to return through the plasma source **12**, unlike in the present invention, the resonance in the plasma source **12** could be adversely affected. Also, as described above, the frequencies are sufficiently different to prevent such occurrences.

**[0070]** The reactor **10** of the invention is particularly suitable for providing stable, substantially repeatable operation by providing isolation of the r.f. currents and plasma potential of the source **12** and first manifold **15**, from the wafer support **20**. Such isolation allows the plasma potential at the surface **41** of the first gas manifold **15** to be well defined and maintained. Without a well defined plasma potential, the system may differ from day to day depending upon the amount of plasma contact with the surface **41** of the first gas manifold **15**, causing the system to drift and adversely effect the repeatability of the deposition process. It is important to note that the mechanical configuration of the second gas manifold **17** may vary considerably while achieving the same r.f. return function as described above, and that all such mechanical variations are within the scope of the invention.

**[0071]** As mentioned above a particular advantage of the invention is the symmetrical flow of the gases within the reactor provided by the inventive design and the on-axis pump in particular, which corresponds to a reduction of interference with the symmetry of the pump flow in the region proximate the wafer **24**. Referring again to **FIG. 6**, the symmetrical flow within the reactor **10** is represented by flow lines, and shows desirable uniform radial flow at the wafer plane. At low pressures the mean free path of the gas is relatively long, providing fewer collisions between molecules. It is desirable for the gas density to be highly uniform

in the area proximate to the wafer. This is enhanced by the reactor by providing equal effective pumping speed around the wafer plane at the wafer support **20**. Equal effective pumping speed is accomplished by axially aligning the wafer and the pump with the process chamber, so that the geometric orientation promotes equal distance flow around the wafer. Thus, the flow of gas is symmetrical across the wafer which enhances uniform processing of the wafer. Moreover, during the reactor self-clean operation, gases are preferably injected through first gas injection manifold **15** and having the pump along the axis of symmetry enhances uniform gas flow, and thus cleaning action, throughout the reactor **10**.

[0072] The inventive reactor **10** design promotes deposition of uniform films as illustrated by **FIGS. 10a** and **10b**. A wafer **24** is provided having a substrate **80** with a plurality of device, features **81a-d** formed thereon. The gap spacing between device features **81a** and **81b** is 0.25 microns, and the gap spacing between device features **81a** and **81c** is 0.30 microns. The aspect ratio is 2.5:1. An oxide layer **82** is deposited on device features **81** and substrate **80** in the reactor of this invention. As shown the reactor **10** and method successfully deposit void-free layers filling the 0.25 and 0.30 micron gaps with excellent step coverage.

[0073] Referring to **FIG. 11**, the deposition rate as a function of r.f. bias applied to the wafer support in the invention is illustrated. The deposition rate is normalized and is represented as: the deposition rate per silane flow (in microns per minute per sccm) which is then plotted as a function of r.f. bias power (watts) applied to the wafer support.

[0074] The foregoing description of specific embodiments of the invention have been presented for the purpose of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications, embodiments, and variations are possible in light of the above teaching. It is intended that the scope of the invention be defined by the claims appended hereto and their equivalents.

What is claimed:

1. A plasma enhanced chemical processing reactor, comprising:

- a plasma chamber;
- a first gas injection manifold communicating with said plasma chamber for receiving at least one first gas;
- a source of electromagnetic energy for exciting said at least one first gas to form a plasma;
- a process chamber communicating with the plasma chamber whereby the plasma extends into said process chamber;
- a wafer support for supporting a wafer, said wafer support disposed in said process chamber;
- a second gas manifold, disposed in said process chamber and encircling said wafer support, for directing reactive gases towards said wafer support whereby the reactive gases interact with the plasma to process the surface of a wafer supported on said wafer support; and
- a vacuum system for removing gases from the bottom of said process chamber.

2. The reactor of claim 1 wherein said source of electromagnetic energy is an inductively coupled plasma source.

3. The reactor of claim 1 wherein said source of electromagnetic energy comprises a helical resonator and a capacitive shield disposed within said helical resonator.

4. The reactor of claim 1 wherein said wafer support is attached to at least one surface of said process chamber, such that said wafer support is suspended within said process chamber.

5. The reactor of claim 1 wherein said vacuum system comprises a turbo pump.

6. The reactor of claim 5 wherein said vacuum system further comprises a vacuum isolation valve disposed between said process chamber and said pump for isolating said process chamber from said pump.

7. The reactor of claim 1 wherein said second gas manifold includes a plurality of spaced nozzles for distributing gases proximate to said wafer.

8. The reactor of claim 1 wherein said wafer support comprises a support body having a support surface for retaining said wafer;

a voltage source coupled to said support body for electrostatically coupling said wafer to said support surface;

a cooling system having a plurality of gas distribution grooves formed in said support surface and configured for uniformly distributing a gaseous substance between said wafer and said support surface;

at least one member having two ends, one of said ends attached to said support body and the other said end attached to a surface of said process chamber.

9. The reactor of claim 8 wherein said at least one member is attached to a vertical surface of said process chamber such that said support body is suspended within said process chamber.

10. The reactor of claim 8 wherein said at least one member is hollow and contains therein at least one conduit for passing cooling medium to said support body, and at least one conduit for coupling dc energy to said wafer support.

11. The reactor of claim 10 wherein said at least one member further comprises at least one conduit for coupling r.f. energy to said wafer support.

12. The reactor of claim 1 wherein said wafer support is attached to a carriage assembly, and said carriage assembly is attached to said process chamber, such that said wafer support may be removed from said process chamber.

13. The reactor of claim 1 wherein said first gas manifold comprises at least one plenum formed therein for receiving at least one gaseous chemical; and

a plurality of holes communicating with each of said at least one plenum and said holes disposed along said plenum, for distributing said at least one gaseous chemical to said plasma chamber.

14. A plasma enhanced CVD system, comprising:

a plasma chamber having a source of electromagnetic energy, said source having a helical resonator and a capacitive shield disposed within said helical resonator for generating a plasma,

a process chamber communicating with said plasma chamber whereby the plasma extends into said process chamber, and

a support, in said processing chamber, for supporting a wafer for interaction with the plasma extending into the process chamber.

**15.** A plasma enhanced CVD system comprising:

a cylindrical plasma chamber having a source of electromagnetic energy for generating a plasma;

a cylindrical process chamber communicating with said plasma chamber whereby the plasma extends into said process chamber,

a support, in said processing chamber, for supporting a wafer for interaction with the plasma extending into said process chamber; and

a vacuum system positioned on the axis of said process chamber for exhausting said process chamber.

**16.** The reactor of claim 15 wherein the interaction with said plasma deposits a layer of material on the surface of the wafer.

**17.** The reactor of claim 15 wherein the interaction with said plasma etches the surface of the wafer.

**18.** A plasma enhanced CVD system, comprising:

a plasma chamber;

a first gas injection manifold communicating with said plasma chamber for receiving at least one first gas;

a source of electromagnetic energy for exciting said at least one first gas to form a plasma;

a process chamber communicating with the plasma chamber whereby the plasma extends into said process chamber;

a wafer support for supporting a wafer, said wafer support being substantially axially aligned with said process chamber;

a second gas manifold, said second gas manifold being substantially axially aligned with said process chamber and encircling said wafer support, for directing reactive gases towards said wafer support whereby the reactive gases interact with the plasma and deposit a material on the wafer; and

a vacuum system substantially axially aligned with said process chamber for removing gases from said process chamber.

**19.** The reactor of claim 18 wherein said wafer support is attached to at least one surface of said process chamber, such that said wafer support is suspended within said process chamber.

**20.** The reactor of claim 18 wherein said first gas manifold comprises a plurality of channels formed therein for discretely receiving at least one gaseous chemical;

and a plurality of holes communicating with each of said channels, for discretely distributing said at least one gaseous chemical to said plasma chamber.

**21.** The reactor of claim 18 wherein said vacuum system comprises a turbo pump.

**22.** The reactor of claim 21 wherein said vacuum system further comprises a vacuum isolation valve disposed

between said process chamber and said pump for isolating said process chamber from said pump.

**23.** The reactor of claim 18 wherein said second gas manifold includes a plurality of spaced nozzles for distributing gases proximate to said wafer.

**24.** The reactor of claim 18 wherein said wafer support comprises a support body having a support surface for retaining said wafer;

a voltage source coupled to said support body for electrostatically coupling said wafer to said support surface;

a cooling system having a plurality of gas distribution grooves formed in said support surface and configured for-uniformly distributing a gaseous substance between said wafer and said support surface;

at least one member having two ends, one of said ends attached to said support body and the other said end attached to a surface of said process chamber.

**25.** The reactor of claim 24 wherein said at least one member is hollow and contains therein at least one conduit for passing cooling medium to said support body, and at least one conduit for coupling dc energy to said wafer support.

**26.** The reactor of claim 25 wherein said at least one member further comprises at least one conduit for coupling r.f. energy to said wafer support.

**27.** The reactor of claim 18 wherein said wafer support is attached to a carriage assembly, and said carriage assembly is attached to said process chamber, such that said wafer support may be removed from said process chamber.

**28.** A plasma enhanced chemical processing reactor, comprising:

a cylindrical plasma chamber;

a first gas injection manifold communicating with said plasma chamber for receiving at least one first gas;

a source of electromagnetic energy having a helical resonator and a capacitive shield disposed within said helical resonator, for exciting said at least one first gas to form a plasma;

a cylindrical process chamber communicating with the plasma chamber whereby the plasma extends into said process chamber;

a wafer support for supporting a wafer, said wafer support disposed on axis within said process chamber and attached to at least one surface of said process chamber such that said wafer support is suspended within said process chamber;

a second gas manifold, disposed on axis within said process chamber and encircling said wafer support, for directing reactive gases towards said wafer support whereby the reactive gases interact with the plasma and deposit a material on the wafer; and

a vacuum system communicating with said process chamber and disposed beneath said wafer support, substantially aligned on axis with said process chamber for removing gases from said process chamber.

**29.** The reactor of claim 28 wherein said vacuum system comprises a turbo pump.

**30.** The reactor of claim 28 wherein said vacuum system further comprises a vacuum isolation valve disposed between said process chamber and said pump for isolating said process chamber from said pump.

**31.** The reactor of claim 28 wherein said second gas manifold includes a plurality of spaced nozzles for distributing gases proximate to said wafer.

**32.** The reactor of claim 28 wherein said wafer support comprises a support body having a support surface for retaining said wafer;

a voltage source coupled to said support body for electrostatically coupling said wafer to said support surface;

a cooling system having a plurality of gas distribution grooves formed in said support surface and configured for uniformly distributing a gaseous substance between said wafer and said support surface;

at least one member having two ends, one of said ends attached to said support body and the other said end attached to a surface of said process chamber.

**33.** The reactor of claim 32 wherein said at least one member is hollow and contains therein at least one conduit for passing cooling medium to said support body, and at least one conduit for coupling dc energy to said wafer support.

**34.** The reactor of claim 32 wherein said at least one member further comprises at least one conduit for coupling r.f. energy to said wafer support.

**35.** The reactor of claim 28 wherein said wafer support is attached to a carriage assembly, and said carriage assembly is attached to said process chamber, such that said wafer support may be removed from said process chamber.

**36.** The reactor of claim 28 wherein said first gas manifold comprises at least one plenum formed therein for discretely receiving at least one gaseous chemical; and

a plurality of holes communicating with each of said at least one plenum and said holes disposed along said plenum, for discretely distributing said at least one gaseous chemical to said plasma chamber.

**37.** A method of operating a plasma enhanced chemical processing reactor, having a plasma chamber and a process chamber, said process chamber including a wafer support for supporting a wafer disposed within said process chamber, comprising the steps of:

generating a plasma within a plasma chamber, said plasma chamber having a top surface;

referencing the plasma to a first voltage potential along said top surface;

applying r.f. energy to said wafer support thereby creating a second voltage potential, wherein the difference

between said first voltage potential and said second voltage potential induces diffusion of the plasma to the area proximate to said wafer support.

**38.** The process of claim 37 including the additional step of introducing at least one gaseous chemical into said process chamber proximate to said wafer support,

whereby said at least one gaseous chemical and the plasma interact proximate said wafer support to deposit a layer of material on the wafer.

**39.** The process of claim 37 including the additional step of introducing at least one gaseous chemical into said process chamber proximate to said wafer support, and said plasma chamber, whereby said at least one gaseous chemical and the plasma interact proximate said wafer support to deposit a layer of material on the wafer.

**40.** The process of claim 37 including the additional step of introducing at least one gaseous chemical into said process chamber, whereby said at least one gaseous chemical and the plasma interact proximate said wafer support to etch the surface of the wafer.

**41.** The process of claim 37 including the additional step of introducing at least one gaseous chemical into said process chamber and said plasma chamber, whereby said at least one gaseous chemical and the plasma interact proximate said wafer support to etch the surface of the wafer.

**42.** The method of claim 37 wherein the step of referencing the plasma further comprises providing a connection to electrical ground to said top surface and creating a potential in the range of substantially 10 to 30 Volts at said top plate.

**43.** The method of claim 37 wherein the step of applying r.f. energy to said wafer support further comprises applying said r.f. energy in the range of substantially 1 to 60 MHz.

**44.** The method of claim 37 wherein the step of applying r.f. energy to said wafer support further comprises applying said r.f. energy at approximately 3.39.

**45.** The process of claim 37 including the additional step of introducing at least one gaseous chemical into said plasma chamber, whereby said at least one gaseous chemical extends into said process chamber and cleans the surfaces of said plasma and process chambers.

**46.** The reactor of claim 9 wherein said at least one member is hollow and contains therein at least one conduit for passing cooling medium to said support body, and at least one conduit for coupling dc energy to said wafer support.

**47.** The reactor of claim 33 wherein said at least one member further comprises at least one conduit for coupling r.f. energy to said wafer support.

\* \* \* \* \*